




# Deskduino V2

SLQ Wiki Fabrication Lab 2025/07/18 10:22

~~REVEAL~~

# Deskduino V2

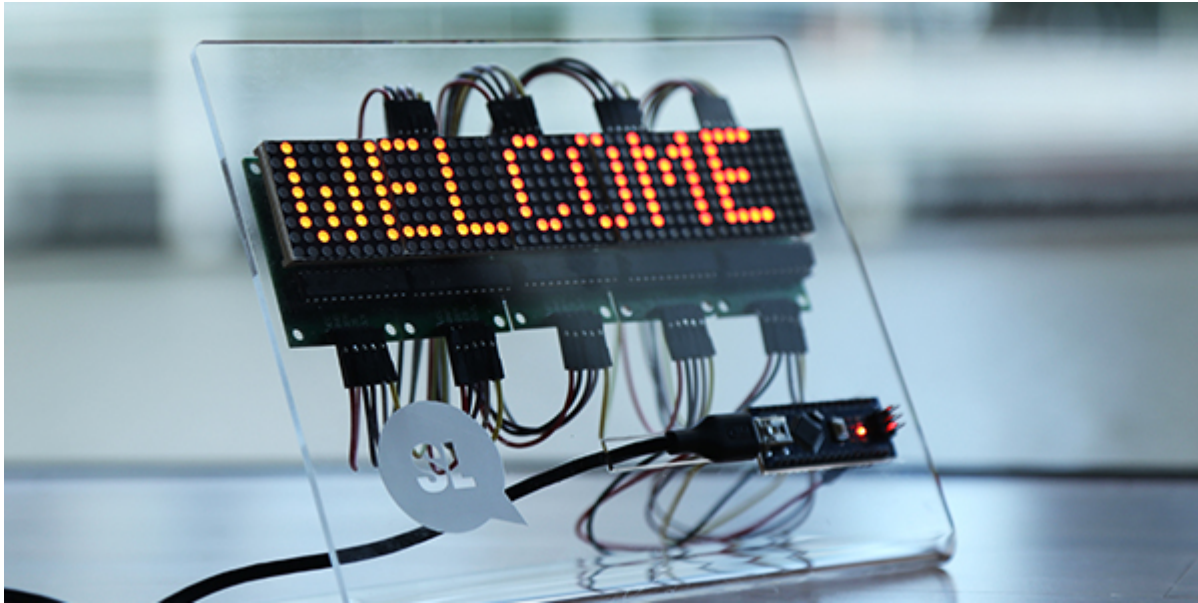

The Edge June 2018

## Summary

Participants will create an electronic display for their workplace/desk. The display uses a programmable 8x8 LED Matrix display, an Arduino Nano and a cardboard frame made using a laser-cutter.

This workshop was initially developed for the Flying Arts program ArtizINNOVATE@theEdge in June 2017, then run at Woodford Folk Festival 2017/2018 and eventually run as an in-house workshop. This latest iteration (June 2018) uses an acrylic case, suitable for either a single or multiple screens.

[Cardboard Version.](#)

## Skills Introduced


- High level overview of circuit and components
- Case assembly and wiring between components
- Coding in the Arduino IDE

# Materials

## Electronics

Material	Quantity	Cost	Supplier
Arduino Nano v3	1	\$3.40	<a href="#">AliExpress</a>
MAX7219-dot-matrix-module	1	\$2.10	<a href="#">AliExpress</a>
Short USB Cable - USB-A to Micro USB	1	\$2	<a href="#">Tronixlabs</a>
A3 3mm acrylic (clear or other)	0.1	0.75	<a href="#">Acrylics Online</a>
	Total	\$7.50	

## Frame

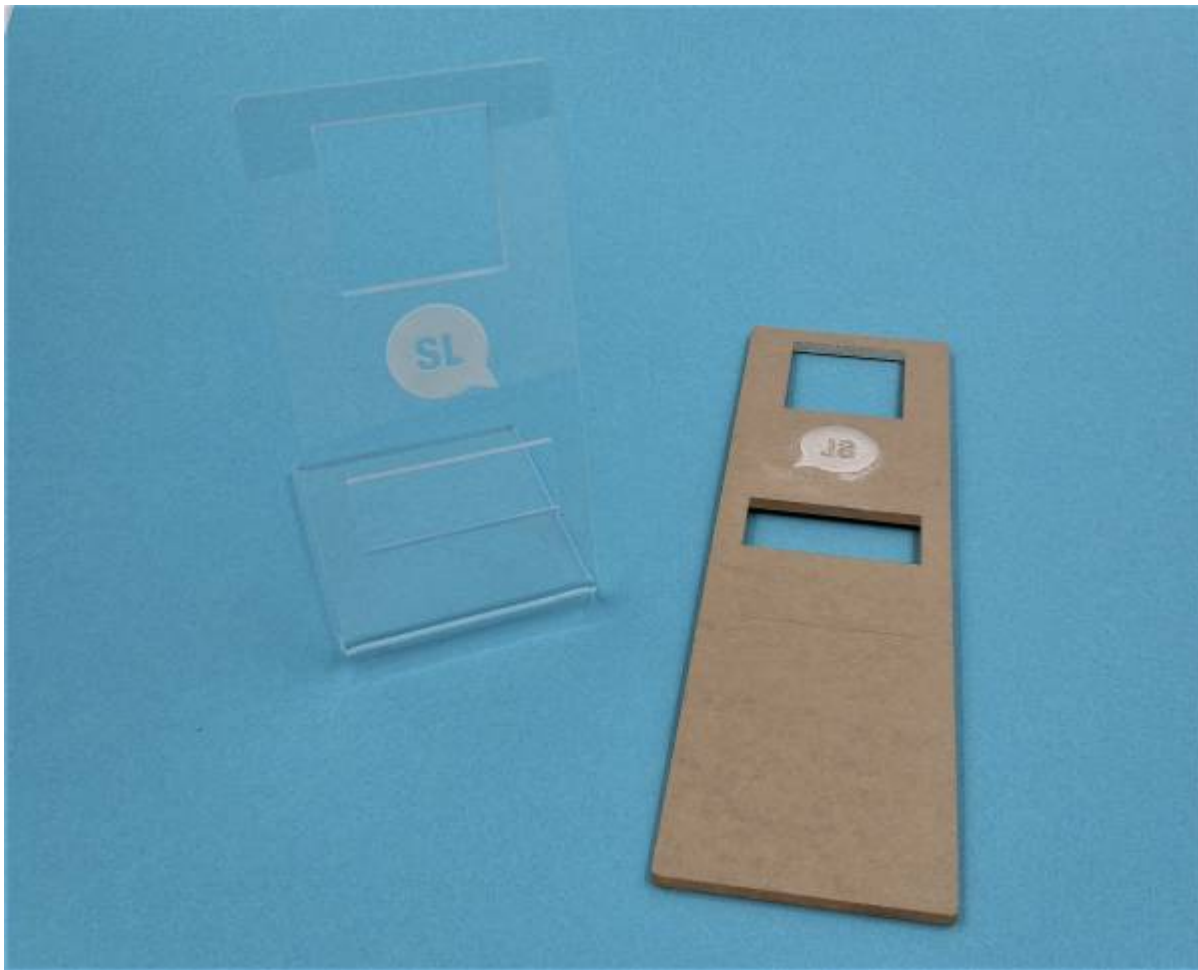

## Tools and Preparation

## Tools

- Computer with working USB 2.0 ports
- A working internet connection (or pre-downloaded files)
- Pen/Awl
- Ruler

# Introduction to Arduino Microcontrollers

## What is a micro controller?

A microcontroller (or MCU for microcontroller unit) is a small computer on a single integrated circuit.

- one or more CPUs (processor cores)
- memory
- programmable input/output peripherals
- can be mixed signal devices interacting with
  - digital signals
  - analog singals

## Why use an MCU?

Microcontrollers are small, low powered and robust, making them perfect for [embedded systems](#) such as:

- medical devices
- remote controls
- office machines
- appliances
- power tools
- toys
- wearables!

## What is Arduino?

Arduino is an open source computer hardware and software company, project, and user community <sup>1)</sup>

- The hardware is based on the Amtel 8-bit AVR MCU
- The software uses the Processing IDE, with a simplified version of the C++ language
- Open source has led to the creation of a huge range of
  - clones
  - compatible devices

- peripherals
- A strong community means
  - “Someone, Somewhere has solved the problem”
  - we can run this workshop using and adapting existing resources.


# Assembly and Testing

It's time to get started!

## Step One: Connecting and Testing the Arduino Nano


### Download the Arduino IDE

Download the latest version of the [Arduino IDE](#).

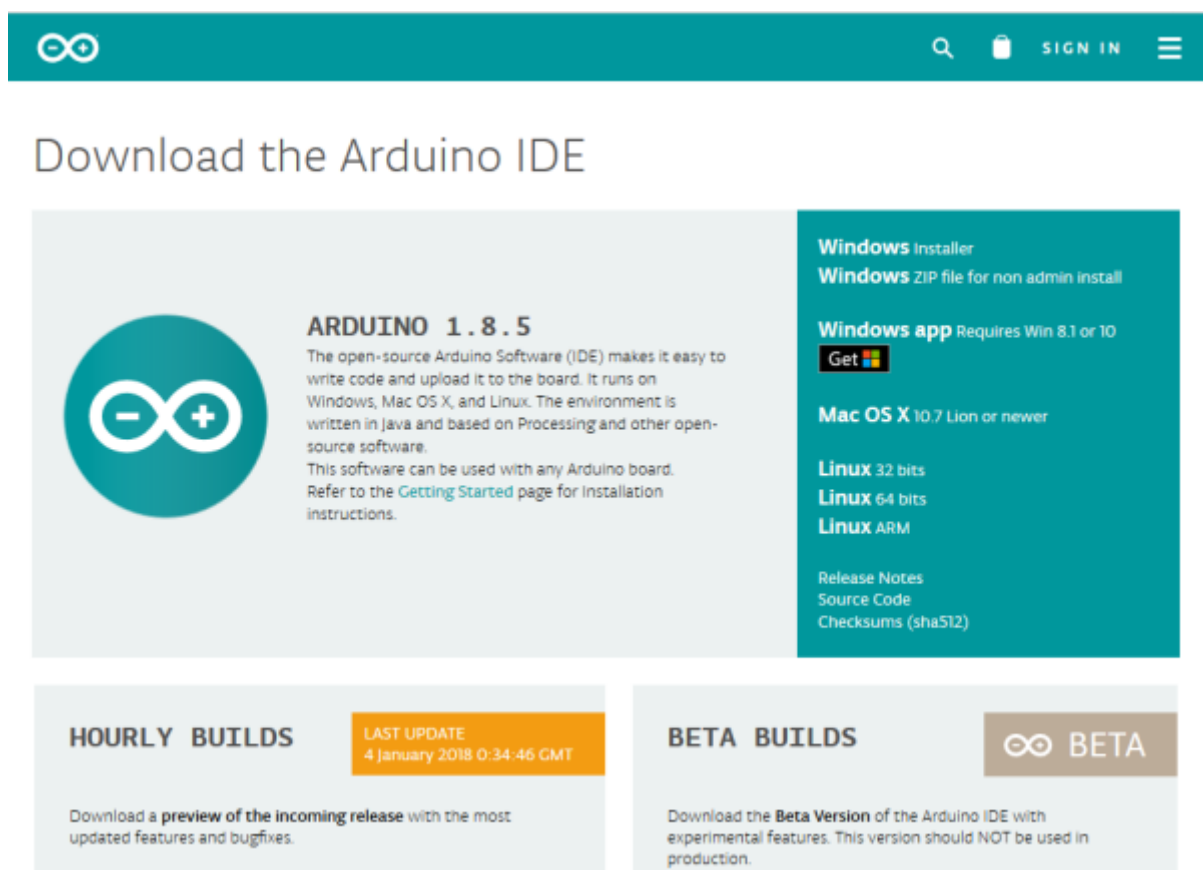

The screenshot shows the Arduino IDE download page. At the top is a teal header with the Arduino logo, a search icon, a shopping bag icon, and a 'SIGN IN' link. Below the header, the main heading is 'Download the Arduino IDE'. The central content area features the Arduino logo on the left and text on the right stating 'ARDUINO 1.8.5'. The text describes the IDE as open-source software that runs on Windows, Mac OS X, and Linux, and is based on Processing. It also mentions that the software can be used with any Arduino board and refers to the 'Getting Started' page for installation instructions. To the right of this text is a teal sidebar with links for 'Windows Installer', 'Windows ZIP file for non admin install', 'Windows app' (with a 'Get' button), 'Mac OS X 10.7 Lion or newer', 'Linux 32 bits', 'Linux 64 bits', 'Linux ARM', 'Release Notes', 'Source Code', and 'Checksums (sha512)'. Below the main content area are two sections: 'HOURLY BUILDS' and 'BETA BUILDS'. The 'HOURLY BUILDS' section has a yellow 'LAST UPDATE' box showing '4 January 2018 0:34:46 GMT' and a description of the preview release. The 'BETA BUILDS' section has a 'BETA' badge and a description of the beta version.

Select your operating system and when prompted choose “Just Download”.

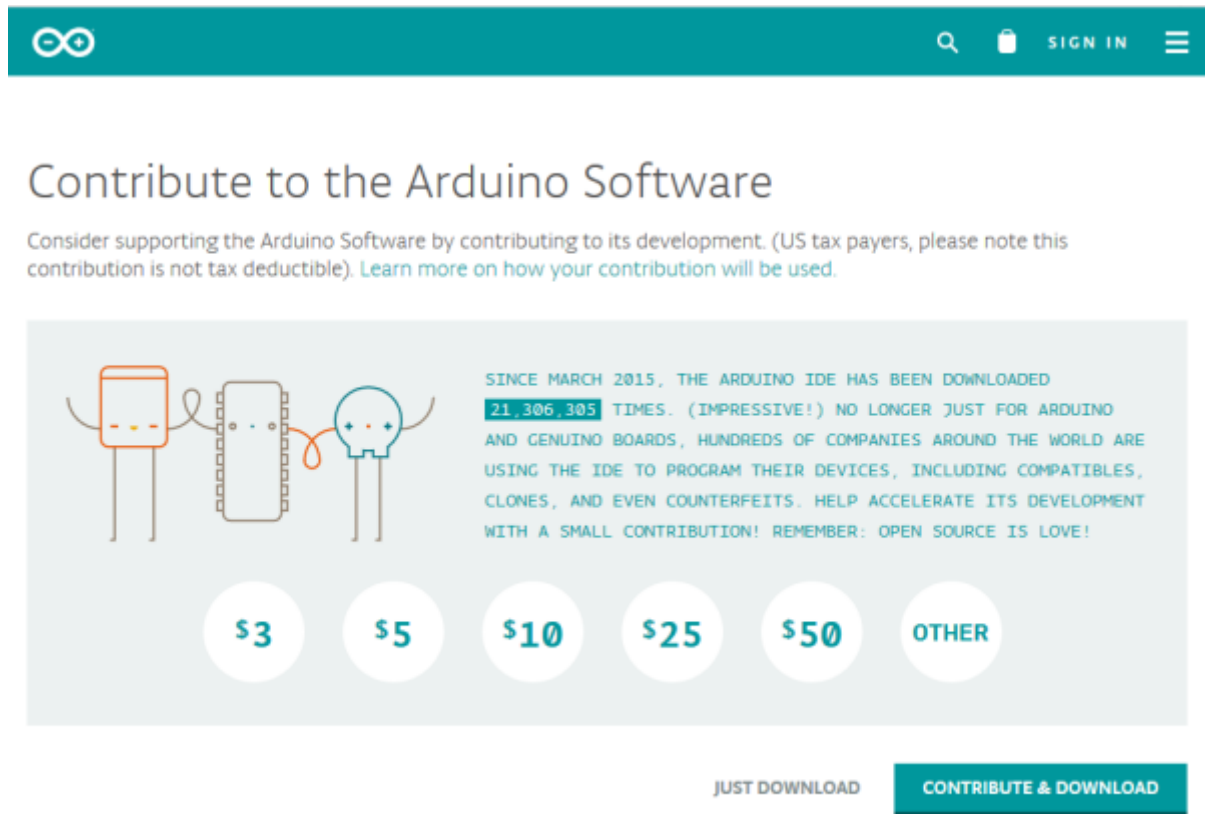

The screenshot shows the Arduino Software Contribution page. At the top is a teal header with the Arduino logo, a search icon, a shopping cart icon, and a 'SIGN IN' button. Below the header is the title 'Contribute to the Arduino Software'. A paragraph of text reads: 'Consider supporting the Arduino Software by contributing to its development. (US tax payers, please note this contribution is not tax deductible). [Learn more on how your contribution will be used.](#)' Below this is a light gray box containing an illustration of three stylized figures (a red one, a brown one, and a blue one) connected by lines. To the right of the illustration, text states: 'SINCE MARCH 2015, THE ARDUINO IDE HAS BEEN DOWNLOADED **21,306,305** TIMES. (IMPRESSIVE!) NO LONGER JUST FOR ARDUINO AND GENUINO BOARDS, HUNDREDS OF COMPANIES AROUND THE WORLD ARE USING THE IDE TO PROGRAM THEIR DEVICES, INCLUDING COMPATIBLES, CLONES, AND EVEN COUNTERFEITS. HELP ACCELERATE ITS DEVELOPMENT WITH A SMALL CONTRIBUTION! REMEMBER: OPEN SOURCE IS LOVE!' Below the text are six circular buttons with the values '\$3', '\$5', '\$10', '\$25', '\$50', and 'OTHER'. At the bottom right of the gray box are two buttons: 'JUST DOWNLOAD' and 'CONTRIBUTE & DOWNLOAD'.

If you are using a genuine Arduino with the FT chipsets you won't need to download any drivers on PC and MacOS Sierra. If you are using a knockoff Arduino with the CH340G chip you will need to download the [drivers](#) for Mac.

Follow the instruction and install the program on your computer.

## Connect Your Arduino

A red and then a green LED will light up on the Arduino, indicating that it's receiving power (for some Arduinos this may just be a single red light)




Now launch Arduino IDE






Go to the *Tools* menu and change the following:

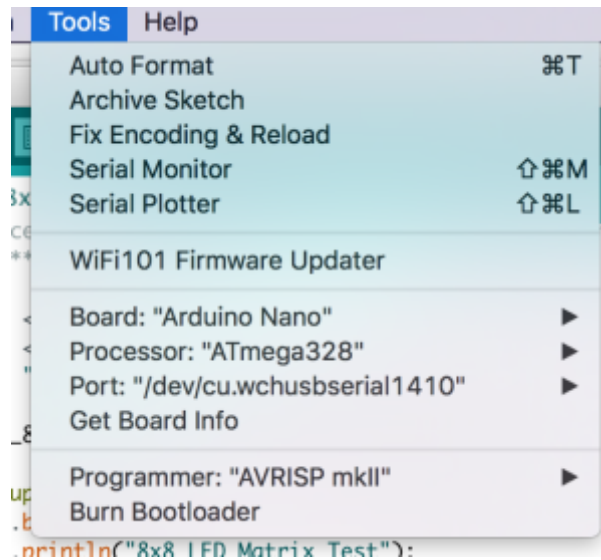


- **Board** to **Arduino Nano**



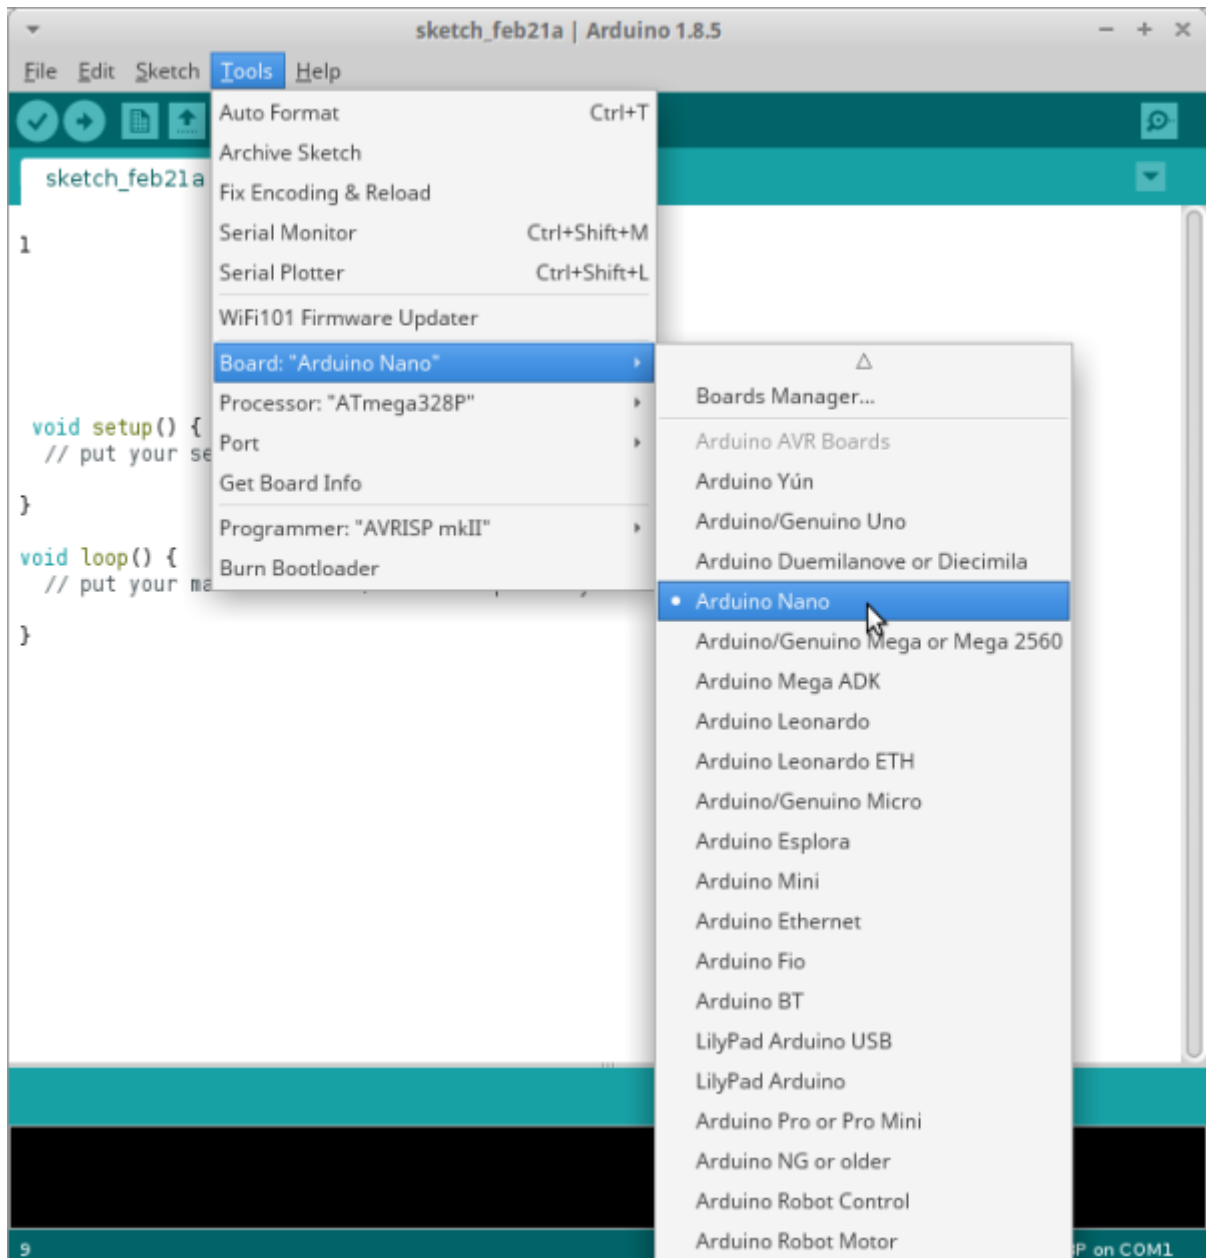

- **Processor** to **ATmega328** or ATmega328(Old Bootloader) if you have an older Nano

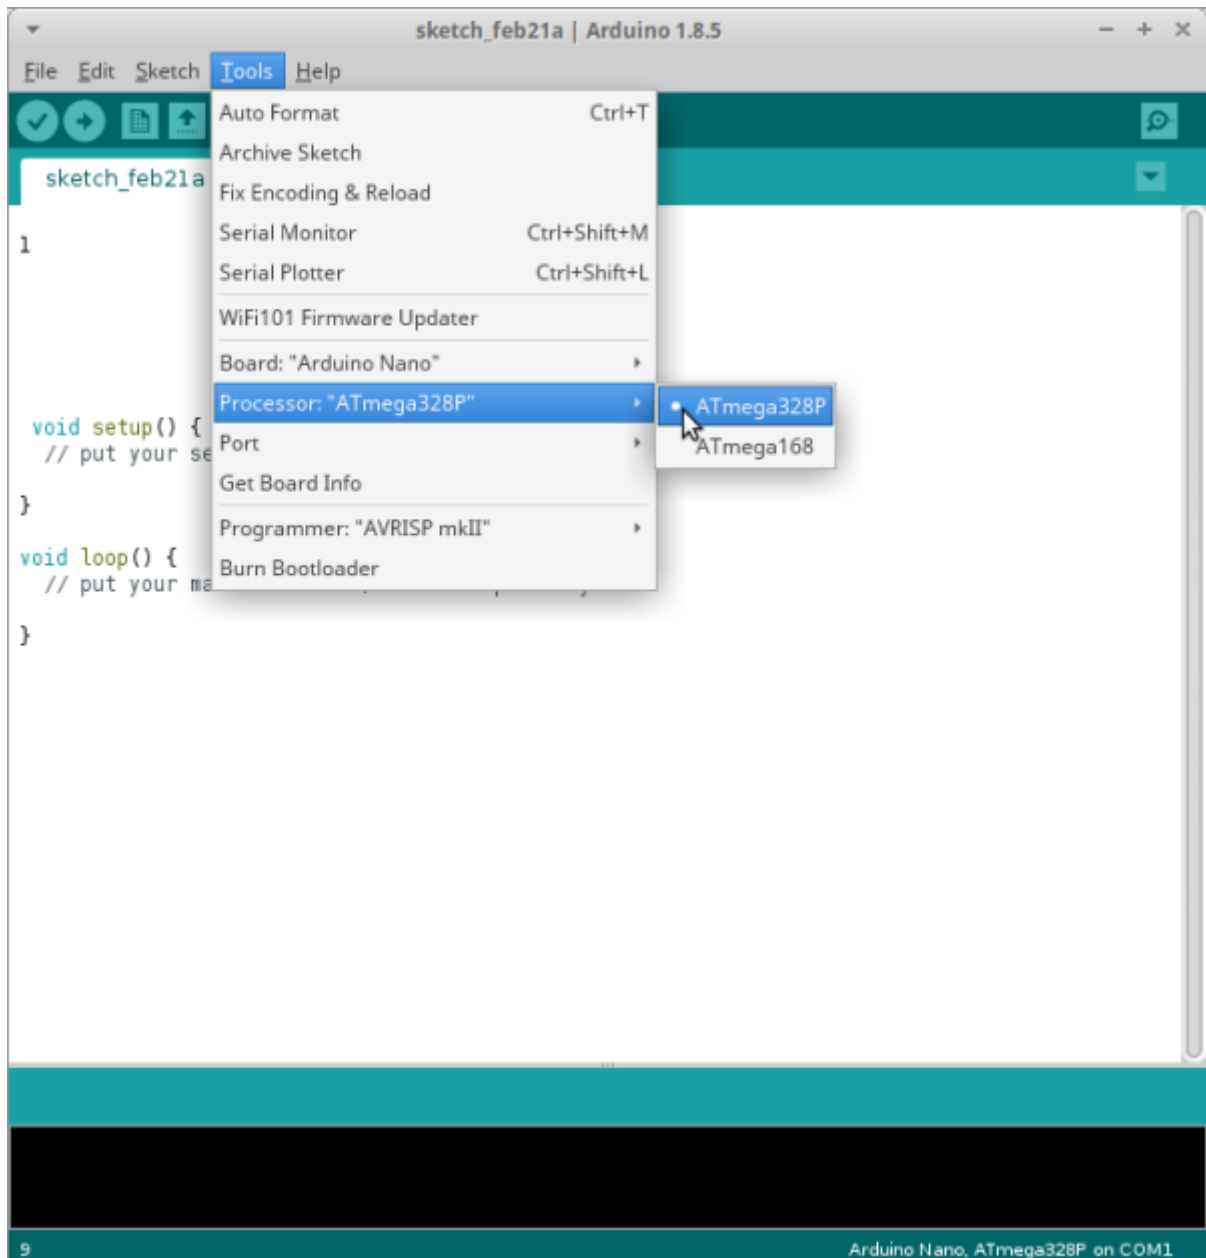

- **Port** to USB/Serial (different depending on OS and Chip)
  - If you are having problems finding a USB port you most likely need to download the correct drivers.

Once again, the exact OS (and version) as well as the chip make a big difference.

Once that is done, run "Get Board Info" in the same menu, this should bring up a small pop-up with some information.

As long as you're not receiving an error in the console, you have successfully connected your Arduino!

## Test with the Blink Example

Another step you can take to test that everything is working is to load one of the basic example projects and upload it to the Arduino.

- Go to File → Examples → 01.Basic → Blink
- Click on the verify button (Check mark) and let it compile. You should get a message at the top of the console telling you when it's done (this should take no more than a few seconds)
- Once this is done, without any errors, click the Upload button (Arrow)
- This will upload the instructions to the Arduino and it will say "Done Uploading" when everything worked
- Your red LED on the Nano should now be blinking, one second on, one second off
- Uploading scripts to your Arduino works!

Now we are ready for the real projects

## Step Two: Assembly

If you need to use the plastic bending apparatus, use 105 degrees and the settings for 3mm acrylic. Align the horizontal line below the logo with the heating wires. make sure you are facing the plastic the correct way, so that when the logo is displayed correctly. Also make sure to remove the protective plastic from the acrylics before bending.

The display and Arduino rest in the frame's cavities and generally don't need to be glued. If you're using a transparent acrylic glue will look bad and/or will create visible stains on the acrylic from the glue fumes.

Make sure the Arduino's legs are pointing towards the back. If you've already connected your pins it is possible to squeeze the Arduino through from the back, given the right angle.

This is how the wires need to be connected:

- SCL/CLK (System Clock) → D10
- DIN(Data In) → D8
- CS (Chip Select) → D9
- GND (Ground) → GND
- VCC (Voltage) → VIN

## Step Four - Using the Library and Project

Now it's time to check our Arduino and LED are talking to each other.

### Download and install the Library

In order to make the LED display a *lot* easier to work with we'll need to install a custom version of the

MaxMatrix library (found in the [download](#) section below).

- Go to Sketch → Include Library → Add .ZIP Library
- Just find and click the downloaded file and it will be added to your project automatically

## Download and open the project

[Below](#) you will find the project files compressed into a .ZIP file.

- Extract the content wherever you'd like it and open up the *wearables\_matrix\_ino* file
- The .INO file format should be associated with Arduino and launch it automatically
- Alternatively you can open Arduino and select the File → Open option in the menu

Note: You won't be able to run this script unless you have downloaded the library above.

## Upload the Project

It is time to test the project file in your desk Arduino. Upload it the same way as the blink file. Your desk Arduino should say Free Bear Hugs.

## Hacking the Code

While it's beyond the scope of this workshop to teach you how to program your Arduino - here are some tips on:

- Changing the displayed text
- Displaying a symbol
- Changing the speed of the text scrolling

```
void loop()
{
  // displayText(text1, 100); // Send scrolling Text
  displayText(text2, 100); // Send scrolling Text
  //displayCustom(smile01, 1000);
}
```

Look for the `void loop()` section. This contains what your Arduino will do once it turns on. In this case it will:

- ignore `displayText(text1, 100);` as it has been commented out with two backslashes
- `displayText(text2, 100)`
- ignore `displayCustom(smile01, 1000)`

Want to change the displayed text?

- Look for text2

```
char text2[] = " FREE BEAR HUGS!!! "; // Scrolling Text
```

- and change it

```
char text2[] = " I Have Changed!! "; // Scrolling Text
```

## References

- [MaxMatrix Github](#)

## Downloads

### Arduino

- [Project Files](#)
- [MaxMatrix Library](#)

### Laser Cutter Files

These files are for cutting on The Edge Rayjet. Settings are:

Colour	Power	Speed	Description
Black	60	80	Engraving
Red	100	1.7	Cut lines
Blue	50	50	Bend Line

- 5x Display - Corel Draw File
- 1x Display - Corel Draw File

<sup>1)</sup>

<https://en.wikipedia.org/wiki/Arduino>