# Speedy 300 Laser Cutter Techniques

SLQ Wiki Fabrication Lab 2024/04/27 03:44

# **Speedy 300 Laser Cutter Techniques**

## How to deep etch and shallow etch same item


#### **First way**

Stub: greyscale bitmap

#### Second way

If you wish to you can run several passes of an etch to make a very deep cut, then you can run another (shallower) etch on top of/around it. We use this technique to make the captured nut slot for the general induction activity.

1. To do so you will need to set up your file as normal in Corel, except that where you want the deep etch make it a new colour, e.g teal

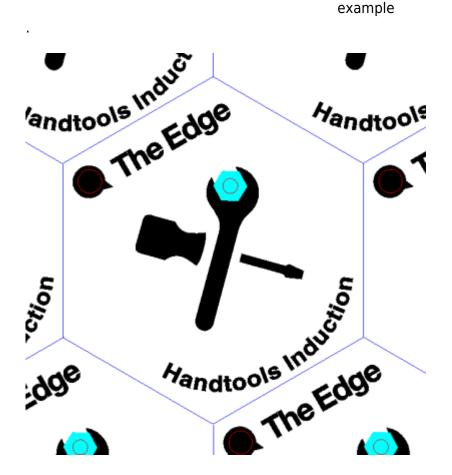

3/5

2. When you print from corel, select preferences>favourites and double click default to set up most of the profile as normal.

nt								>
General Color	Composite	Layout	Prepress	Vo Issues			_	
Destination								
Printer:	Trotec Engra	ver v11.3.0	)		•	Preferences		
Page:	Match orien	tation (La	ndscape)		-			
Status:	Default print						111111111	H-H-H
Location: Comment:	C:\ProgramD	ata\Troteo	:\PrinterDri	ver.Speedy\Trote		Print to file	144444	-1-1-1-
							+++++++	1-1-1-
Print range			-	Copies Number o	of coniec		++++++	7.7.
Current de		Document	ts	Number	or copies:	1	HHHHH	1-1-1-
O Current pa	ige ()	Selection			2 3 3	Collate	44444	
O Pages:	Even & Odd		~		_		PERFERENCE	1-1-1-1-
				Print a	s <u>b</u> itmap:	300 🗘 dpi		
Print style:	Custom (Curre	nt setting	s not saved	)		<ul> <li>Sa<u>v</u>e As</li> </ul>		
Print Prev	ie <u>w</u>	≪		Print (	Cancel	Apply Help	🗸 🔺 🕨 🕨   Page 1	
P. P								
				8				

3. But then open the preferences again and go to the print tab, and under process options change the halftone setting to color. Then hit the JC button at the bottom to close that window

4/5

Speedy	300	Laser	Cutter	Techniques
--------	-----	-------	--------	------------

HÎ.	
ize Settings	
User-defined Size V	Width 729.00 mm Height 433.00 mm
	Height 433.00 mm
Rotary Attachment	Ø mm
faterial Settings	
→to Standard ~	P 90.00 V 90.00 M 500
Standard 🗸 🗸	P 100.00 V 0.40 M 1000
rocess Options	
Standard V Process Mode	
1000dpi v Resolution	trotec
t None v CutLine	
Color V Halftone	laser. marking cutting engravin
Invert	Shoulder medium V
Flip vertically	Layers
Flip horizontal	Z-Adjust/L 🔶 mm
Enhanced Geometries	E-Pidjustre mm
✓ Inner geometries first	
utopositions the job on the Engraver Pla	te
Quick Print	
Auto Position	

4. Hit apply, then print to open Job Control. This will import the file and recognize the teal engrave (else it will just appear grey when using just the defaults which is not what we want).

Printer: Thote: Engraver v11.3.0	* Epelenences	
Age Match orientation (Landscape)	• Uig 790	
lastus Delault printer, Ready Location C/ProgramData/,Tote/Printe/Dr Consent	iver.Speedy/Trute	4 4
Nint cange Curyent document ①Documents	Copies Number of capies 1	44444444
O <b>Cyrrent page</b> O Selection		4444444
	Print as gitmaps 200 📋 a	41
nt style: Custom (Current ontings not save	a Saya Ao	

5. Now in Job Control, set up the first cut, which is just a teal engrave. Set all other colours to skip. You may also wish to slow the speed down for the teal engrave so it engraves deeply, else you can

**Edge** 2024/04/27 03:44

Speedy 300 Laser Cutter Techniques

several cuts at full speed to deep etch it.

6. Once you have completed your deep etch to your desired depth, turn off the teal, and turn on the rest of the colours to complete your item.

### How to make sure a cut will fit on a scrap

Stub: (trace contour with laser when connected)



Speedy 300 Laser Cutter Techniques